

OPERATOR'S MANUAL

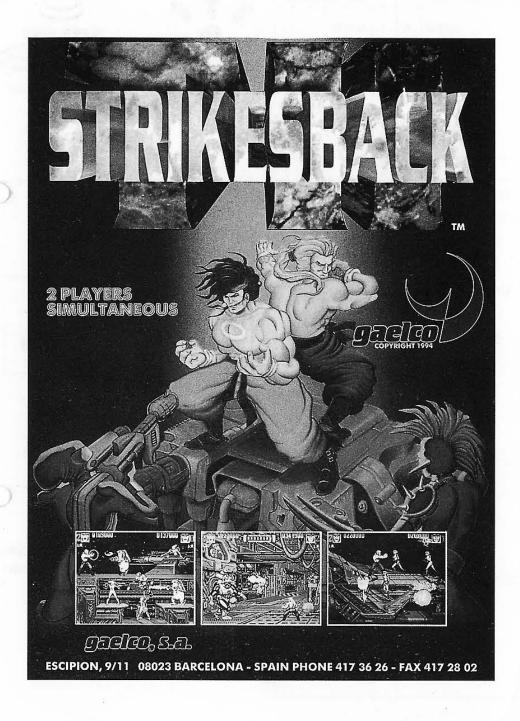

PCB CONECTOR JAMMA

A B C D E F H J K L M N P R S	1 2 3 4 5 6 7 8 9 10 11 12 13 14	G N D G N D + 5V + 5V N.C. + 12V COIN COUNTER 1 (COIN LOCK OUT1) SPEAKER (+) N.C. VIDEO RED VIDEO BLUE VIDEO GND
B C D E F H J K L M N P R	2 3 4 5 6 7 8 9 10 11 12 13	G N D + 5V + 5V N.C. + 12V COIN COUNTER 1 (COIN LOCK OUT1) SPEAKER (+) N.C. VIDEO RED VIDEO BLUE
C D E F H J K L M N P R	3 4 5 6 7 8 9 10 11 12 13	+ 5V + 5V N.C. + 12V COIN COUNTER 1 (COIN LOCK OUT1) SPEAKER (+) N.C. VIDEO RED VIDEO BLUE
D E F H J K L M N P	4 5 6 7 8 9 10 11 12 13	+ 5V N.C. + 12V COIN COUNTER 1 (COIN LOCK OUT1) SPEAKER (+) N.C. VIDEO RED VIDEO BLUE
E F H J K L M N P R	5 6 7 8 9 10 11 12 13	N.C. + 12V COIN COUNTER 1 (COIN LOCK OUT1) SPEAKER (+) N.C. VIDEO RED VIDEO BLUE
F H J K L M N P R	6 7 8 9 10 11 12 13	+ 12V COIN COUNTER 1 (COIN LOCK OUT1) SPEAKER (+) N.C. VIDEO RED VIDEO BLUE
H J K L M N P	7 8 9 10 11 12 13	COIN COUNTER 1 (COIN LOCK OUT1) SPEAKER (+) N.C. VIDEO RED VIDEO BLUE
J K L M N P	8 9 10 11 12 13	(COIN LOCK OUT1) SPEAKER (+) N.C. VIDEO RED VIDEO BLUE
K L M N P R	9 10 11 12 13	(COIN LOCK OUT1) SPEAKER (+) N.C. VIDEO RED VIDEO BLUE
L M N P R	10 11 12 13	SPEAKER (+) N.C. VIDEO RED VIDEO BLUE
M N P	11 12 13	N.C. VIDEO RED VIDEO BLUE
N P R	12 13	VIDEO RED VIDEO BLUE
P R	13	VIDEO BLUE
R	1,3550	
100.00	14	VIDEO GND
s		
	15	TEST SW
Т	16	COIN 1
U	17	1P START
٧	18	1P UP
w	19	1P DOWN
х	20	1P LEFT
Υ	21	1P RIGHT
z	22	1P SHOT
а	23	1P JUMP
b	24	1P SUPER SHOT
С	25	N. C.
d	26	N. C.
е	27	GND
	28	GND
	X Y Z a b c	X 20 Y 21 Z 22 a 23 b 24 c 25 d 26 e 27

CONTROL PANEL






CONTROL STICK

JUMP

MONITOR	HORIZONTAL
GAME STYLE	1 PLAYER o 2 PLAYERS SIMULTANEOUS

POSITIONS OF DIP SW



COIN / CREDIT OPTION SWITCH SETTING

DIP SW 1

OPTION				S1	S2	S3	S4	S5	S6	S7	S8		
	1	COIN	1	CREDIT							OFF	OFF	OFF
C	2	COINS	1	CREDIT		(, -3)			100		OFF	OFF	ON
0	3	COINS	1	CREDIT	14.200						OFF	ON	OFF
1	4	COINS	1	CREDIT							OFF	ON	ON
N	5	COINS	1	CREDIT							ON	OFF	OFF
	6	COINS	1	CREDIT	Baresti, indi						ON	OFF	ON
1	3	COINS	2	CREDITS	36 L.						ON	ON	OFF
	4	COINS	3	CREDITS	8						ON	ON	ON
	1	COIN	1	CREDIT				OFF	OFF	OFF			
С	1	COIN	2	CREDITS				OFF	OFF	ON			
0	1	COIN	3	CREDITS	i i			OFF	ON	OFF			
1	1	COIN	4	CREDITS				OFF	ON	ON			
N	- 1	COIN	5	CREDITS	į.			ON	OFF	OFF			
	1	COIN	6	CREDITS	8			ON	OFF	ON			
2	2	COINS	3	CREDITS				ON	ON	OFF			
	3	COINS	4	CREDITS				ON	ON	ON			
	START	1 CR./	CON	T. 1 CR.			OFF		- 11				
START 2 CR./CONT. 1 CR.					ON								
	FREE PLAY				OFF								
YES YES			YES	ON									

OPTION SWITCH SETTING

DIP SW 2

OPTIO	OPTION			S3	S4	S5	S6	S7	S8
	1 NORMAL							OFF	OFF
GAME DIFICULTY	2 EASY		1112-122					OFF	ON
	3 HARD							ON	OFF
	4 HARDEST			140				ON	ON
NOT U	NOT USED						OFF		
NUMBER	2				OFF	OFF			
OF	3				OFF	ON	100		
	4				ON	OFF			
LIVES	1				ON	ON			l marie
ADVERTISE	YES			OFF					
SOUND	NO			ON					
NOT U	NOT USED						144		ų i
TEST	NO	OFF							
1551	YES	ON							

